

**CAUTION:**


- \* Use only DOT 3 brake fluid from a sealed container.
- \* Handle brake fluid with care because it can damage paint.
- \* Never allow contaminants (dirt, water, etc.) to enter the brake fluid reservoir.

Rear Brake Fluid Level:

Remove the reservoir cap and diaphragm. Whenever the level is near the lower level mark (4) on the rear reservoir, fill the reservoir with DOT 3 BRAKE FLUID from a sealed container up to the upper level mark (3). Reinstall the diaphragm, and tighten the reservoir cap securely.

**CAUTION:**

- \* Use only DOT 3 brake fluid from a sealed container.
- \* Handle brake fluid with care because it can damage paint.
- \* Never allow contaminants (dirt, water, etc.) to enter the brake fluid reservoir.

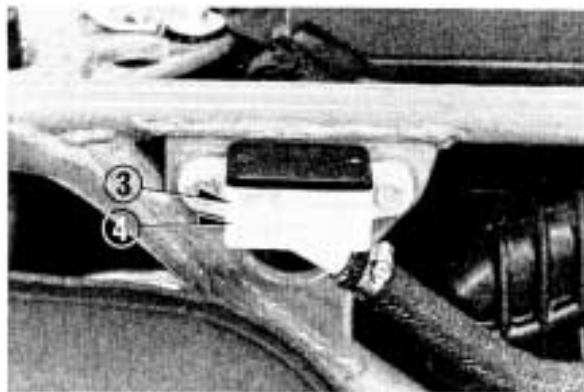

(REAR) (3) Upper level mark  
(4) Lower level mark