


## SEAT

To remove the seat (1), insert the ignition key into the seat lock (2) and turn it clockwise. Pull the seat back and up. To install the seat, insert the prong into the recess under the frame cross member and then push down on the rear of the seat.

### CAUTION:

\* Be sure the seat is locked securely in position after installation.

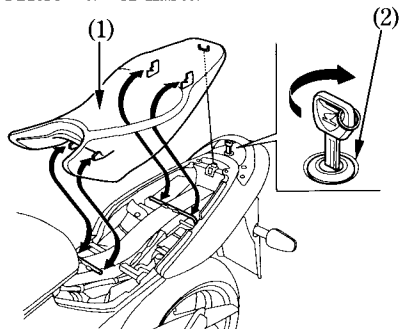


(1) Seat

(2) Seat lock

## DOCUMENT COMPARTMENT

The document bag (1) is in the document compartment (2), located under the seat. This owner's manual and other documents should be stored in this compartment. When washing your motorcycle, be careful not to flood this area with water.

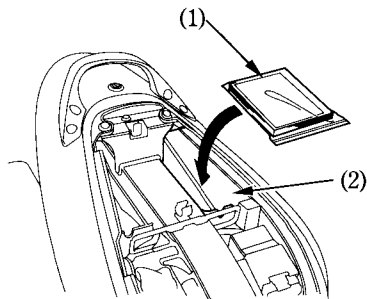

(1) Document bag

(2) Document compartment