


Install the drive sprocket as shown below.

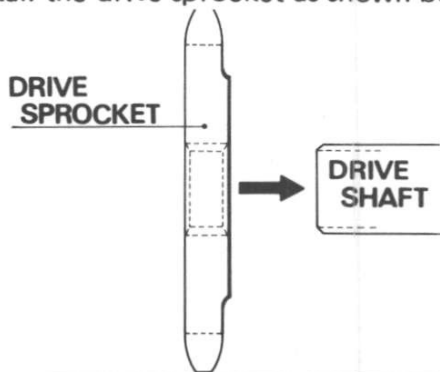

### Recommended Sprocket Sizes


Drive sprocket (engine)	Driven sprocket (rear wheel)
14-Tooth	43-Tooth

#### CAUTION:

Never install a new drive chain on badly worn sprockets, or use new sprockets with a badly worn drive chain. Both chain and sprockets must be in good condition, or the new replacement chain or sprocket will wear rapidly.

### Adjustment

Drive chain slack should be checked and adjusted as necessary, every 1,000 km (500 miles). CB750F motorcycles operated at sustained high speeds, or under conditions of frequent rapid acceleration, may require more frequent adjustment.

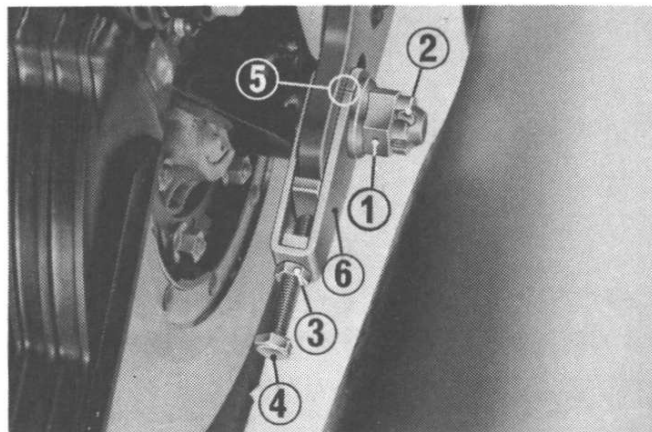

- (1) Axle nut (2) Cotter pin (3) Lock nut  
(4) Drive chain adjusting bolt  
(5) Index mark (6) Chain adjuster plate