


increases or decreases markedly in certain sections of the chain, this indicates that some of the links are either kinked or have worn pins.

Inspecting the Sprocket

Inspect the drive sprocket and rear wheel sprocket for damage or wear. The left rear crankcase cover must be removed for a access to the drive sprocket. Excessively worn sprocket teeth have a hooked and asymmetric appearance. Replace any sprocket which is damaged or excessively worn

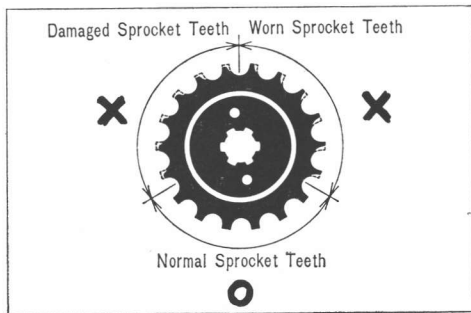

Recommended Sprocket Sizes

Drive Sprocket (engine)	Driven Sprocket (rear wheel)
18 Tooth	48 Tooth

NOTE: Never install a new drive chain on badly worn sprockets, or use new sprockets with a badly worn drive chain. Both chain and sprockets must be in good condition, or the new replacement chain or sprocket will wear rapidly.

Lubrication

Every HONDA CB 750 motorcycle is equipped with an automatic drive chain oiler which lubricates the drive chain with engine oil as the motorcycle is operated. The chain oiler is designed to deliver a maximum volume of oil at speeds between 50 and 70 M.P.H. (80~110km/H) Supplemental lubrication is required if your CB 750 motorcycle is operated at sustained speeds beyond this range, or whenever