

- * Use DOT 3 or 4 brake fluid from a sealed container.
- * Handle brake fluid with care because it can damage paint and instrument lenses.
- * Never allow contaminants (dirt, water, etc.) to enter the brake fluid reservoir.


Other Checks:

Make sure there are no fluid leaks. Check for deterioration or cracks in the hoses and fittings.

Rear Brake

Adjustment:

1. Place the motorcycle on its center stand.
2. The stopper bolt (1) is provided to allow adjustment of the pedal height. To adjust the pedal height, loosen the lock nut (2) and turn the stopper bolt. Tighten the lock nut.
3. Measure the distance the rear brake pedal (3) moves before the brake starts to take hold.

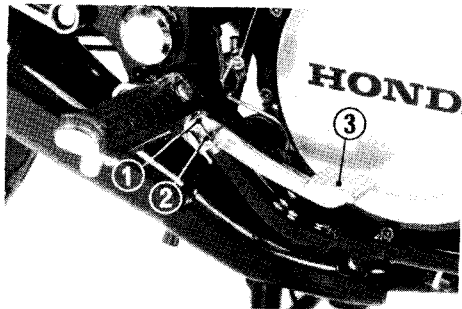

- (1) Stopper bolt (3) Rear brake pedal
(2) Lock nut