


6. Inspect the sprocket teeth for possible wear or damage.

Damaged Sprocket Teeth

REPLACE

Worn Sprocket Teeth

REPLACE



Normal Sprocket Teeth


GOOD

If the drive chain or sprockets are excessively worn or damaged, they should be replaced. Never use a new chain with worn sprockets; rapid chain wear will result.

Adjustment:

If the drive chain requires adjustment, the procedure is as follows:

1. Place a support block under the engine to raise the rear wheel off the ground.
2. Loosen the rear axle nut (1).
3. Loosen the lock nuts (2) on both right and left chain adjusters.

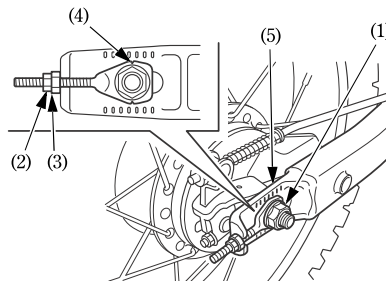

- | | |
|-------------------|---------------------|
| (1) Rear axle nut | (4) Notch |
| (2) Lock nut | (5) Graduated scale |
| (3) Adjusting nut | |