


● CLEANING THE DRIVE CHAIN

1. The life of the drive chain is directly affected by the amount of service. Remove the chain by taking off the joint clip ① and wash in solvent with a stiff brush to take dirt and old grease off.

After drying it thoroughly, place the chain in a vessel containing a mixture of good grade engine oil and petrolatum (ratio of 300 gr of petrolatum to 1 liter of engine oil, SAE \approx 30~50), and heat for 10 minutes at a temperature of 120° to 250°F (50° to 120°C) while agitating.

Remove the chain and hang. After the grease hardens, wipe off the excess with a clean rag and assemble on the machine.

2. To assemble the drive chain, loosen the rear axle, allowing the ends of the drive chain to be connected with a joint. The joint clip should be installed so that the open end will face opposite to the direction of rotation.

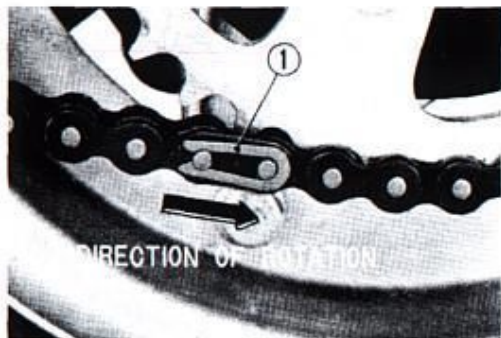

① Drive chain joint clip