

SPARK PLUGS

Refer to the Safety Precautions on page 86 .

Recommended plugs:


CR8EH-9 (NGK) or

U24FER9 (DENSO)

NOTICE

Never use a spark plug with an improper heat range. Severe engine damage could result.

1. Open the seat (page 56).
2. Remove the screws (1).
3. Close the seat.
4. Push the plug maintenance lid (2) backward.

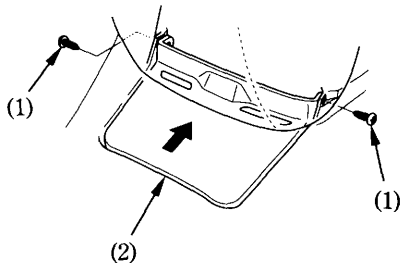

- (1) Screws
(2) Plug maintenance lid