

Brake fluid must be added to the reservoir whenever the fluid level begins to reach the LOWER level mark (4). Remove the screws (1), reservoir cover (2), and diaphragm (3). Fill the reservoir with DOT 4 BRAKE FLUID from a sealed container up to the upper level mark (5). Reinstall the diaphragm and cover. Tighten the screws securely.

**CAUTION:**

- \* **Handle brake fluid with care because it can damage plastic and painted surfaces.**
- \* **When adding brake fluid, be sure the reservoir is horizontal before the cap is removed or brake fluid may spill out.**
- \* **Use only DOT 4 brake fluid from a sealed container.**
- \* **Never allow contaminants such as dirt or water to enter the brake fluid reservoir.**

Other Checks:

Make sure there are no fluid leaks. Check for deterioration or cracks in the hoses and fittings.

## Rear Brake


### Rear Brake Fluid Level:

**▲ WARNING**

- \* **Brake fluid may cause irritation. Avoid contact with skin or eyes. In case of contact, flush thoroughly with water and call a doctor if your eyes were exposed.**

Remove the right side cover.

Check that the fluid level is above the LOWER level mark (4) with the motorcycle in an upright position.

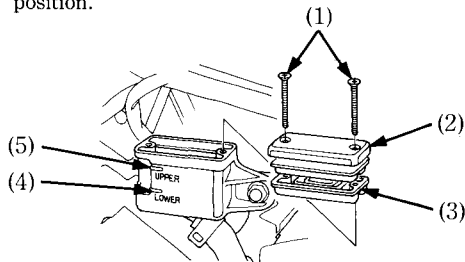

- (1) Screws
- (2) Reservoir cover
- (3) Diaphragm
- (4) LOWER level mark
- (5) UPPER level mark