

## SPARK PLUGS

Refer to the Safety Precautions on page 51 .

Recommended plugs:

Standard:

DPR7EA-9 (NGK) or  
X22EPR-U9 (DENSO)


For extended high speed riding:

DPR8EA-9 (NGK) or  
X24EPR-U9 (DENSO)

### NOTICE

Never use a spark plug with an improper heat range. Severe engine damage could result.

1. Disconnect the spark plug caps ( 1 ) from the spark plugs.
2. Clean any dirt from around the spark plug bases.  
Remove the spark plugs using the spark plug wrench ( 2 ) furnished in the tool kit.

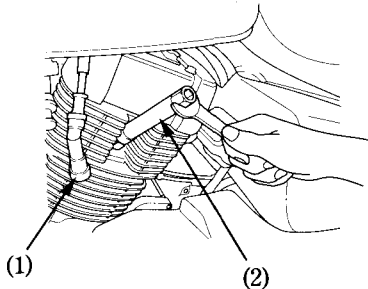

- (1) Spark plug cap
- (2) Spark plug wrench