



the rear axle to position B by using the following combinations:

No. of drive sprocket teeth	No. of driven sprocket teeth	No. of drive chain links	Brake anchor & axle position
15	48	100	B
14	48	100	B

1. Take off the drive chain clip and master link, and remove the drive chain from the sprockets.
2. Remove the crankcase rear left cover and the two 6 mm bolts ②, so that the drive sprocket ③ can be removed.

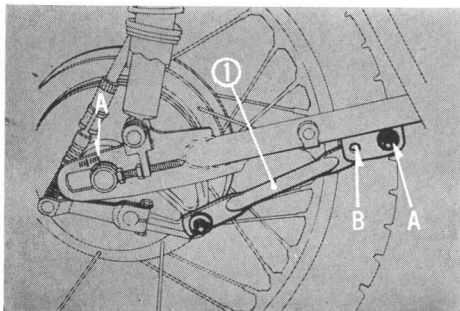

① Rear brake anchor arm

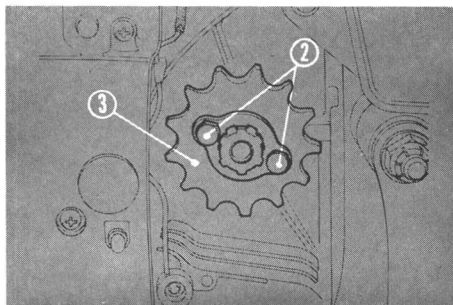

② 6 mm bolts ③ Drive sprocket