

FUEL AND OIL

Fuel Tank

Fuel tank capacity is **2.2 U.S. gal. (8.3 l)** including **0.5 U.S. gal. (1.8 l)** reserve.

Use of low-lead gasoline with a 91 octane rating or higher is recommended. If low-lead gasoline is not available, you may use a leaded regular grade gasoline.


When refueling, take care to exclude dirt, water, or other contaminants from the fuel tank.

WARNING: Gasoline is flammable and explosive under certain conditions. Always stop the engine and do not smoke or allow open flames or sparks near the motorcycle when refueling.

Fuel Filler Cap

Turn counterclockwise **(B)** to open the fuel filler cap.

After refueling, be sure to tighten the fuel filler cap firmly by turning clockwise **(A)**.

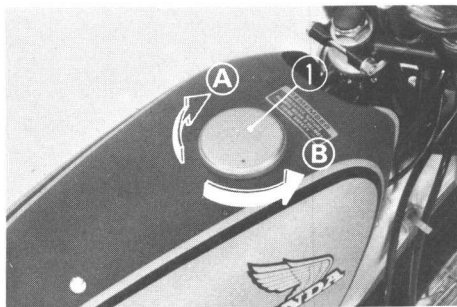

- ① Fuel filler cap
- Ⓐ Tighten Ⓑ Loosen