


Starting Procedure

To restart a warm engine, follow the procedure for "High Air Temperature".

Normal Air Temperature

10° – 35° C (50° – 95° F)

1. Pull the choke lever (1) up all the way to Fully ON (A).

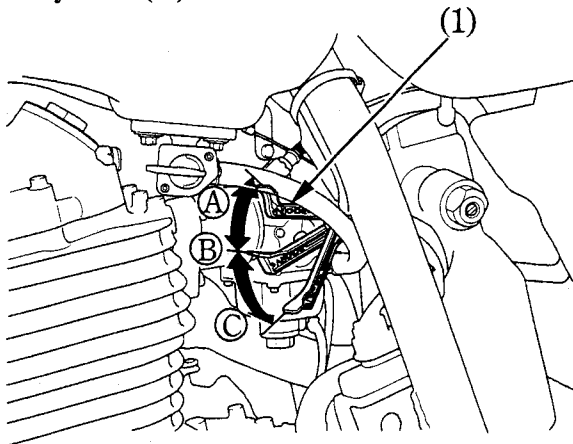

(1) Choke lever

(A) Fully ON

(B) Detent position

(C) Fully OFF

2. Keep the throttle fully closed.
3. Operate the kickstarter to start the engine. Starting from the top of the stroke, kick through to the bottom with a rapid, continuous motion. Do not operate the throttle.

NOTICE

Allowing the kickstarter to snap back freely against the pedal stop can damage the engine case.

4. Immediately after the engine starts, push the choke lever (1) down to the Detent Position (B).

NOTICE

Extended use of the choke may impair piston and cylinder wall lubrication and damage the engine.