


Engine Oil

Checking & Adding Oil

FRONT

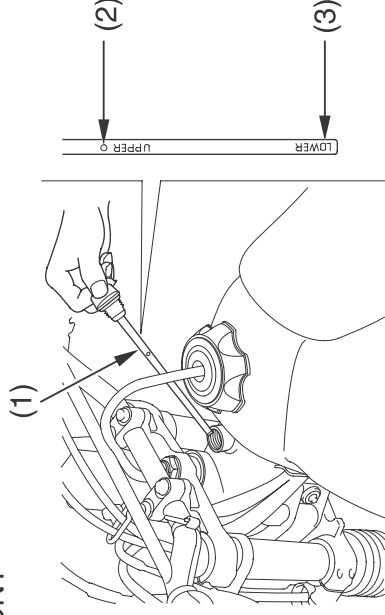

- (1) oil filler cap/dipstick
- (2) UPPER level mark
- (3) LOWER level mark

1. Park your motorcycle on a firm, level surface.
2. Clean around the oil filler cap/dipstick (1) and nearby surfaces.

3. Start the engine and let it idle for 5 minutes. If the air temperature is below 10°C (50°F), let the engine idle for an additional 5 minutes (a total of 10 minutes). An engine that is not warmed sufficiently may give an inaccurate (low) oil level reading. During idling, make sure your motorcycle is supported in an upright position to assure an accurate oil level reading. Stop the engine.
4. Immediately unscrew and remove the oil filler cap/dipstick. Wipe it clean.
5. Hold the motorcycle upright.
6. Insert the dipstick until it seats, but do not screw it in.
7. Remove the dipstick and check the oil level.
 - If the oil is at or near the UPPER level mark (2), you do not have to add oil.
 - If the oil is below or near the LOWER level mark (3), add the recommended oil until it reaches the UPPER level mark. (Do not overfill.) (cont'd)