


Headlight & Taillight


Refer to *Safety Precautions* on page 45.

Headlight Bulb

FRONT

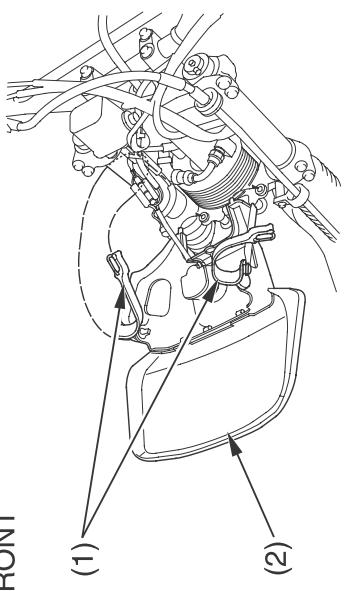

(1) headlight mount bands
(2) number plate

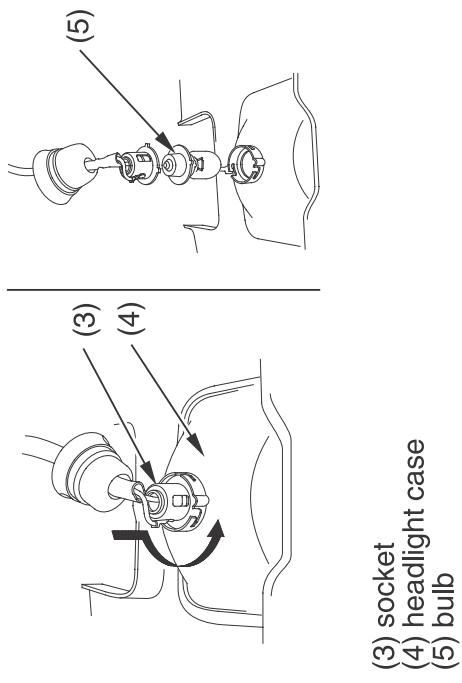

(3) socket
(4) headlight case
(5) bulb

3. Install a new bulb, aligning the tab on the bulb with the groove on the headlight case.
4. To install the headlight, reverse the removal procedure.

1. Remove the two headlight mount bands (1) and remove the front number plate (2).
2. Disengage the socket (3) from the headlight case (4). Remove the bulb (5) from the socket.