


Make sure that the pad spring and retainer clip are installed in the position shown.

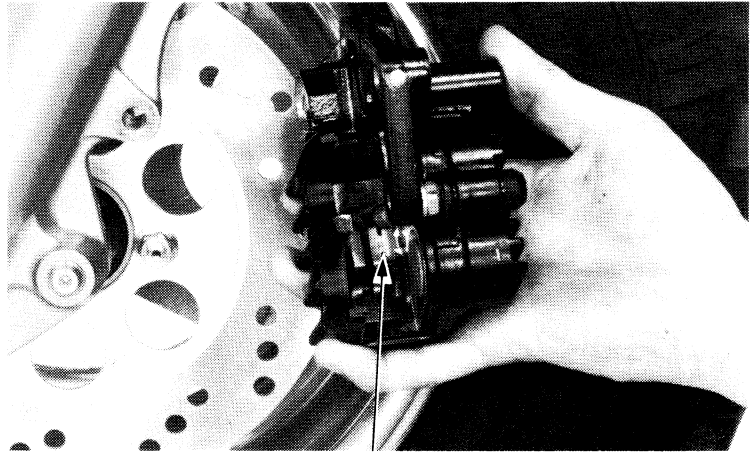


PAD SPRING

Install new brake pads and the pad pins.

NOTE

Always use new pads with mark "N18FF" on the pad.

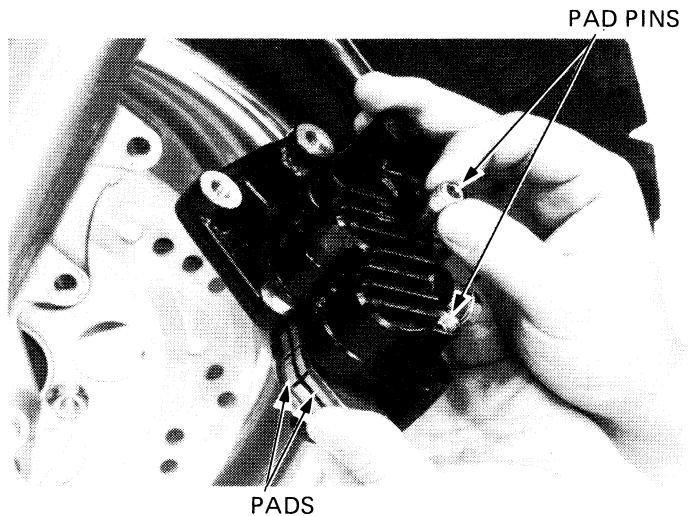

PADS

PAD PINS

Push the caliper pistons in all the way.

CAUTION

- Be careful that the master cylinder does not overflow when the caliper pistons are compressed.
- Brake fluid can cause damage to painted, plastic, or rubber surfaces.

