

## Safety Labels


Safety and information labels on your motorcycle provide important safety information and may warn you of potential

hazards that could cause serious injury. Read these labels carefully and don't remove them. If a label comes off or becomes hard to read, contact your dealer for a replacement.


**⚠ WARNING**

Improper loading can cause a crash and you may be seriously hurt or killed. See "Load Limits and Guidelines" in your Owner's Manual for complete instructions.

For your protection, always wear your helmet while riding. Read the owner's manual carefully.

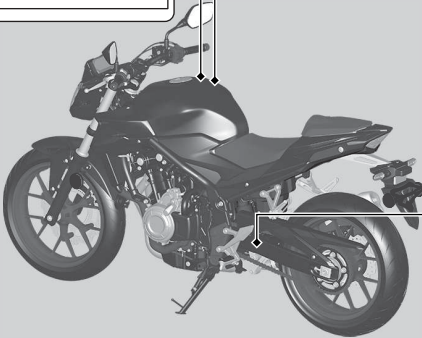

TIRE INFORMATION			
Cold tire pressures	Front	kPa	kgf/cm <sup>2</sup> psi
Up to maximum weight capacity	Front	250	2.50 36
	Rear	250	2.50 36
Up to 90kg(200lbs) load	Front	250	2.50 36
	Rear	250	2.50 36
Tire size	Front	120/70ZR17M/C(58W)	
	Rear	160/70R17M/C(69W)	
Minimum recommend tire center tread depth	Front	1.6mm (0.06in.)	
	Rear	2.0mm (0.08in.)	
Maximum weight capacity		165kg(365lbs)	

DRIVE CHAIN	
Keep chain adjusted and lubricated.	
30 mm (1 1/4 in.) Freeply	
	
Read owner's manual.	