


Tool Box

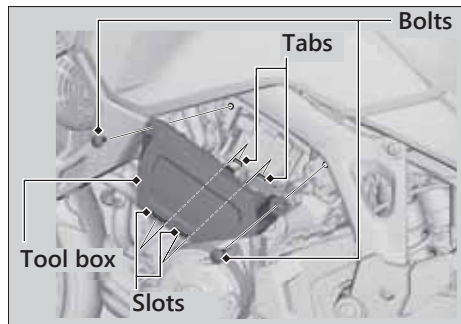

Removal

1. Remove the bolts using the hex wrench provided on the underside of the rear seat. 2 P. 222
2. Remove the tool box by releasing its slots from the tabs.

Installation

Install the parts in the reverse order of removal.