


## Installation

1. Reinstall the battery (1) in the reverse order of removal. Be sure to connect the positive (+) terminal first, then the negative (-) terminal.
2. Tighten the positive (+) terminal bolt (2) and negative (-) terminal bolt (3) to the specified torque:  
1.5 lbf·ft (2.0 N·m, 0.2 kgf·m)
3. Install the battery band (4).
4. Install the positive terminal cover (5).

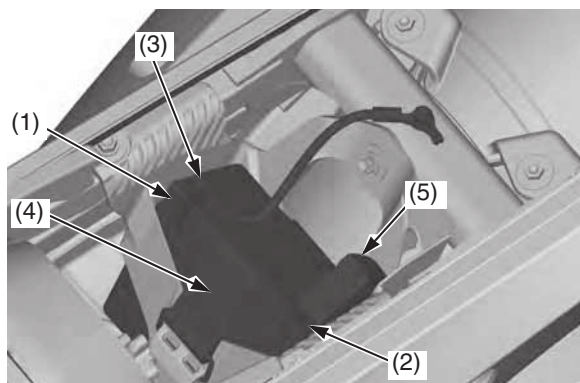

- (1) battery (4) battery band  
(2) positive (+) terminal bolt (5) positive terminal cover  
(3) negative (-) terminal bolt

## Battery Charging

Be sure to read the information that came with your battery charger and follow the instructions on the battery. Improper charging may damage the battery.

We recommend using a charger recommended by your lithium-ion (li-ion) battery manufacturer which can be purchased from your dealer. These units can be left connected for long periods without risking damage to the battery. However, the lithium-ion (li-ion) battery may degrade if stored with a charger connected. Do not intentionally leave the charger connected longer than the time period recommended in the charger's instructions.

Using an existing lead-acid battery charger or battery charger that is not recommended, will damage the electrical circuits within the Li-ion battery.