

## Maintenance Fundamentals

### **Cleaning and Lubricating**

After inspecting the slack, clean the chain and sprockets while rotating the rear wheel.

Use a dry cloth with high flash-point solvent.


Use a soft brush if the chain is dirty.

After cleaning, wipe dry and lubricate with the recommended lubricant.

#### **Recommended lubricant:**

Drive chain lubricant

If not available, use SAE 80 or 90 gear oil.

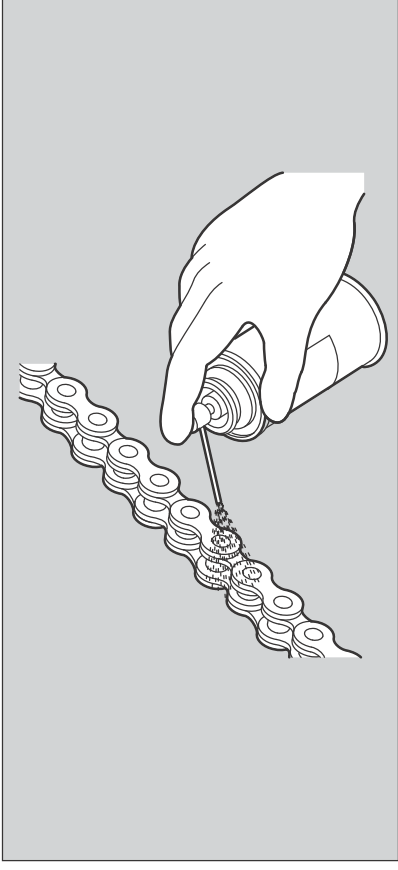

Never use petrol or low flash point solvents for cleaning the drive chain.

A fire or explosion could result.

Avoid getting lubricant on the brakes or tyres.

Avoid applying excess chain lubricant to prevent spray onto your clothes and the motorcycle.