


### **I Cleaning and lubrication**

After inspecting the assembly, clean the chain and sprockets while turning the rear wheel. Use a dry cloth with chain cleaner or a neutral detergent. Use a soft brush if the chain is dirty. After cleaning, remove any remaining dirt and lubricate with the recommended product. If it is not available, use SAE 80 or 90 gear oil.

#### **Recommended lubricant:**

Transmission chain lubricant specifically designed for chains.

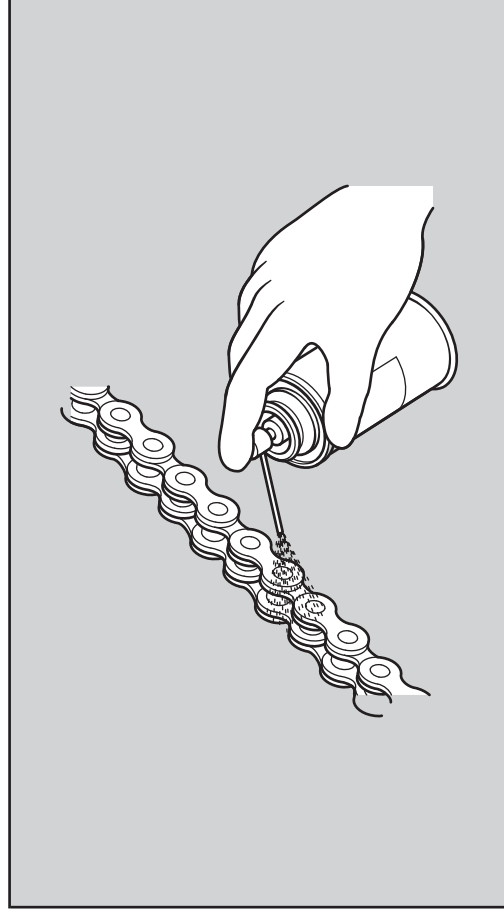

Avoid contact between the lubricant and brakes or tyres.

Avoid applying an excessive amount of chain lubricant to prevent it from splashing it on your clothes or the motorcycle itself.

#### **Recommended coolant**

The motorcycle engine is water-cooled. In order to provide adequate cooling, it is essential for the radiator be filled with coolant up the proper level.

2 P. 62

Pre-mixed solution of antifreeze and distilled water.

#### **Concentration:**

50% antifreeze and 50% distilled water

A concentration of antifreeze below 40% will not provide sufficient protection against corrosion and low temperatures.