


Drive Chain ► Inspecting the Drive Chain Slack

- 4.** Move the drive chain up and down with your finger.

Drive chain slack:


20 to 30 mm (0.8 to 1.2 in)

- Do not ride your motorcycle if the slack exceeds 50 mm (2.0 in).

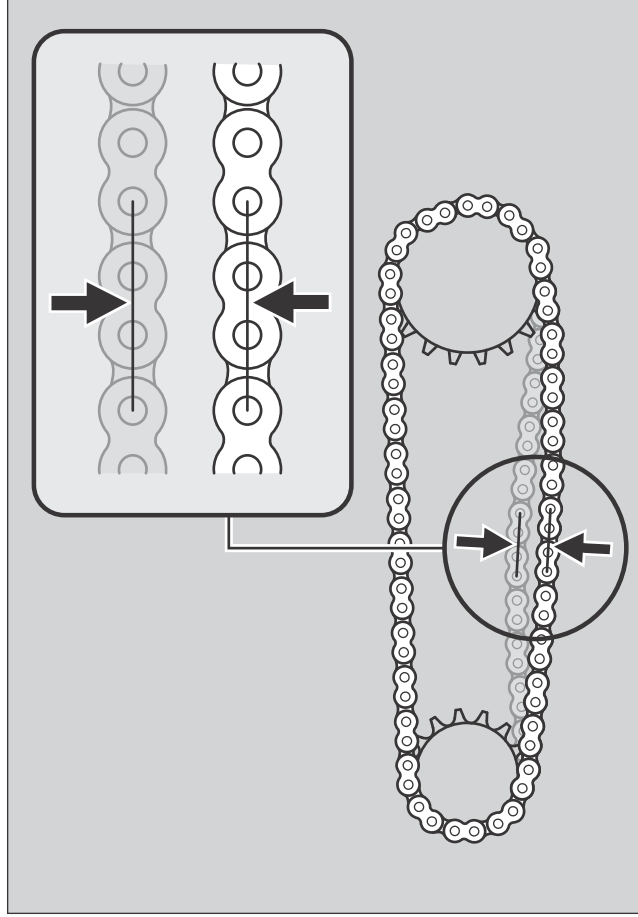

- 5.** Rotate the rear wheel and check that the chain moves smoothly.

- 6.** Remove the chain covers by removing the bolts.

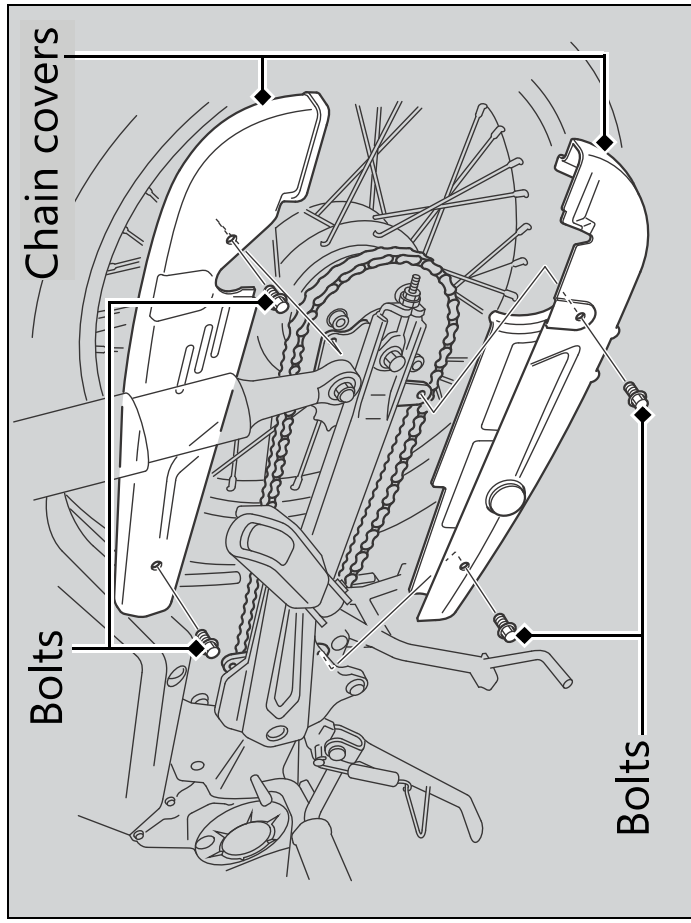

- 7.** Inspect the sprockets. ► P. 40
- 8.** Clean and lubricate the drive chain. ► P. 41
- 9.** Install the parts in the reverse order of removal.
- 10.** Install the chain covers and tighten the bolts.

Torque: 7 N·m (0.7 kgf·m, 5.2 lbf·ft)