


■ Rear Wheel

Removal

1. Support your motorcycle securely and raise the rear wheel off the ground using a maintenance stand or a hoist.
2. Loosen the muffler band bolt.
3. Remove the muffler mounting nut, collar, mounting bolt and washer.

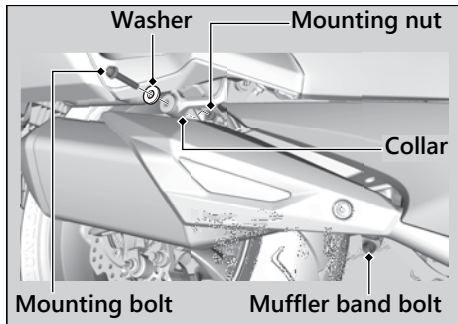

4. Cover the right side of the swingarm with protective tape or cloth.
5. Move the muffler outward by turning it counterclockwise.

