

# Engine Oil & Filters

---

6. If required, remove the rear mudguard lid (page 141) and oil fill cap, and then add the specified oil into the fill cap hole, up to the upper level mark on the dipstick. Do not overfill.
7. Reinstall the oil fill cap and dipstick, and then install the rear mudguard lid.
8. Lower the cargo bed.


## NOTICE

*Running the engine with an improper oil level can cause serious engine damage.*

### UNDER CARGO BED

#### CENTER

(SXS1000M3P/M3D/M3L)

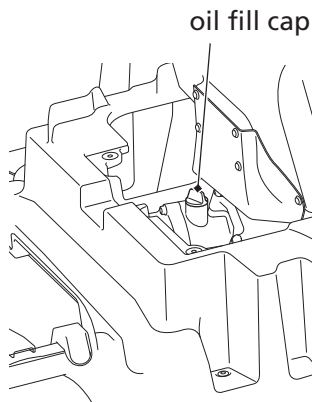

(SXS1000M5P/M5D/M5L)

