

# Engine Oil & Filter

---


6. If required, remove the oil fill cap and slowly or carefully add the specified oil into the fill cap hole (this is a long hose, and it drains into engine SLOWLY), up to the upper level mark on the dipstick. Do not overfill.
7. Reinstall the oil fill cap, dipstick, rubber dust cover and front seat.

## NOTICE

*Running the engine with an improper oil level can cause serious engine damage.*

UNDER SEAT  
LEFT SIDE

rubber  
dust  
cover

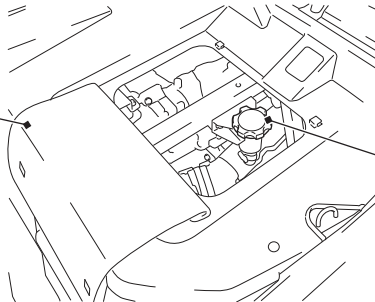

oil fill cap