


# Spark Plugs

7. Using a wire-type feeler gauge, check the spark plug gap. If adjustment is necessary, bend the side electrode carefully.

The gap should be:

**0.03 – 0.04 in (0.8 – 0.9 mm)**

## UNDER SEAT LEFT SIDE

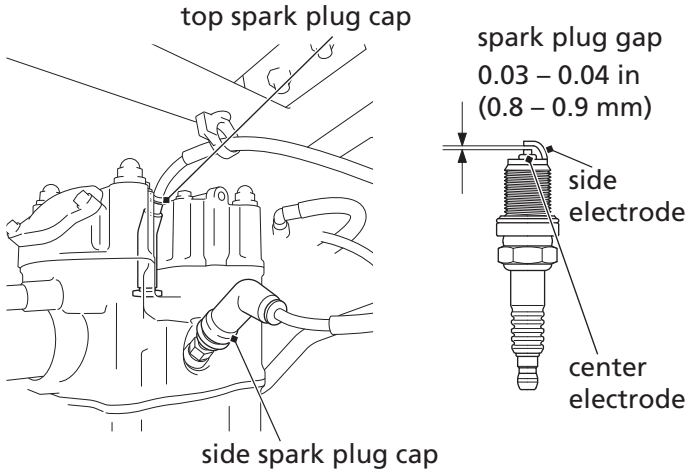

(cont'd)