


Rear Wheel

Removal

1. Park on a firm, level surface.
2. Remove the exhaust pipe joint nuts.

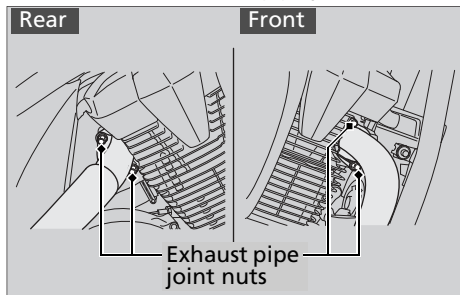

3. Remove the muffler bracket bolt A, bolt B, nuts and washers.
4. Remove the muffler.

