


Inspecting the Front Brake Lever Freeplay

XL125LEK

1. Place your motorcycle on its side stand on a firm, level surface.
2. Measure the distance of the front brake lever before the starts to take hold.

Freeplay at the tip of the brake lever: 10 to 20 mm (0.4 to 0.8 in)

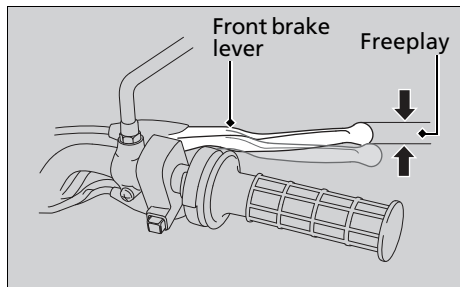

Check the brake cable for kinks or signs of wear. If necessary have it replaced by your dealer.

Lubricate the brake cable with a commercially available cable lubricant to prevent premature wear and corrosion. Make sure the brake arm, spring and fastener are in good condition.