


Thermostat Removal/Installation

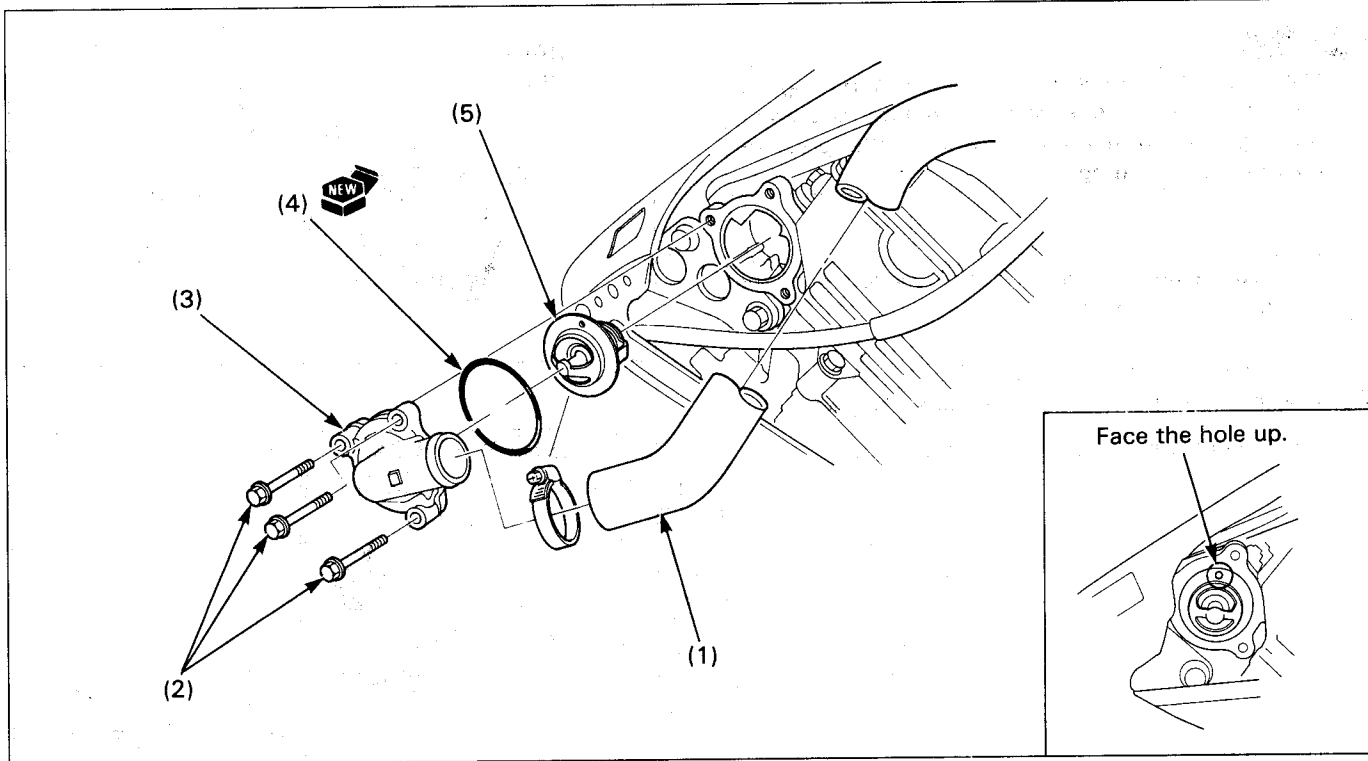

Requisite Service

- Coolant draining (page 5-3)
- Right maintenance lid removal/installation (page 2-3)
- Coolant refill (section 5 of the Common Service Manual)

Procedure	Q'ty	Remarks
Removal order		Installation is in the reverse order of removal.
(1) Water hose	1	
(2) Thermostat housing cover bolt	3	
(3) Thermostat housing cover	1	
(4) O-ring	1	
(5) Thermostat	1	
		NOTE
		• Install the thermostat supporting the motorcycle on the side stand.
		• Install the thermostat with its hole facing up and fit it properly in the housing.