


Front Master Cylinder Removal/Installation

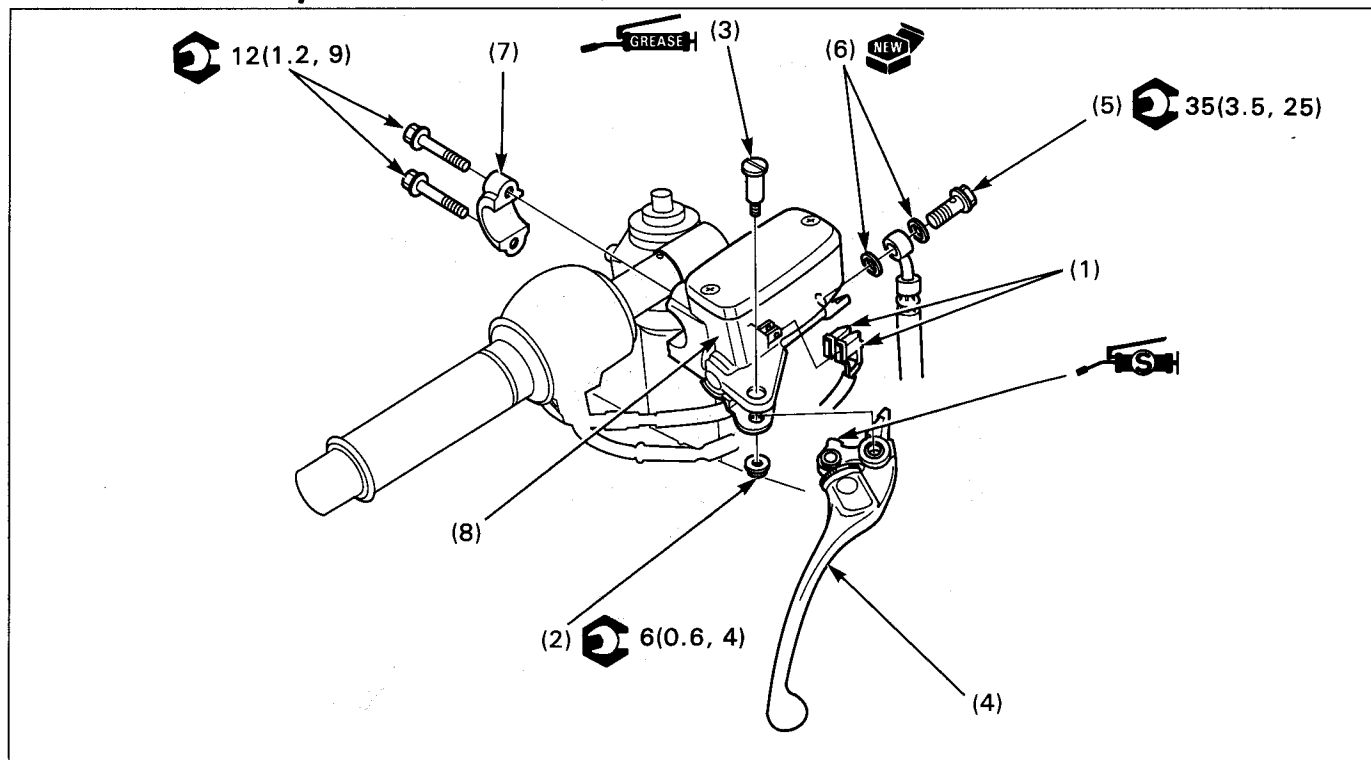

WARNING

- Check the brake system by applying the brake after air bleeding.

CAUTION

- Avoid spilling fluid on painted, plastic, or rubber parts. Place a rag over these parts whenever the system is serviced.
- When removing the oil hose bolt, cover the end of the brake hose to prevent contamination.
- Do not allow the foreign material to enter the system.

NOTE

- Use only DOT 4 brake fluid from a sealed container.
- If you plan to disassemble the master cylinder, remove the brake lever.

Procedure	Q'ty	Remarks
Removal Order		Installation is in the reverse order of removal.
(1) Brakelight switch connector	2	
(2) Brake lever pivot nut	1	
(3) Brake lever pivot bolt	1	
(4) Brake lever	1	
(5) Brake hose bolt	1	
(6) Sealing washer	2	
(7) Brake master cylinder holder	1	Align the holder mating surface with the punch mark on the handlebar and face the holder with the "UP" mark upward.
(8) Front master cylinder assembly	1	