


MAINTENANCE


Lubricate the drive chain with #80 – 90 gear oil or drive chain lubricant designed specifically for use with O-ring chains. Wipe off the excess oil or chain lubricant.

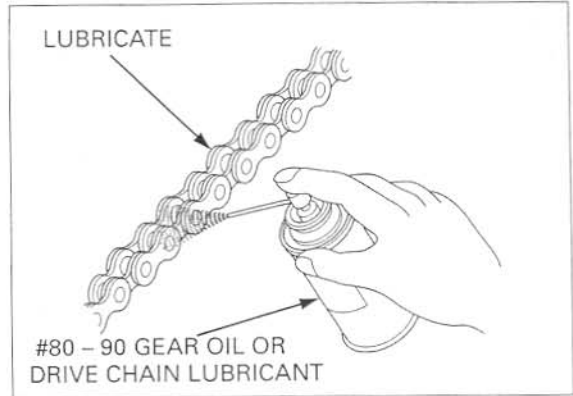

SPROCKET INSPECTION

Inspect the drive and driven sprocket teeth for wear or damage, replace if necessary.

Never use a new drive chain on worn sprockets. Both chain and sprockets must be in good condition, or the new replacement chain will wear rapidly.

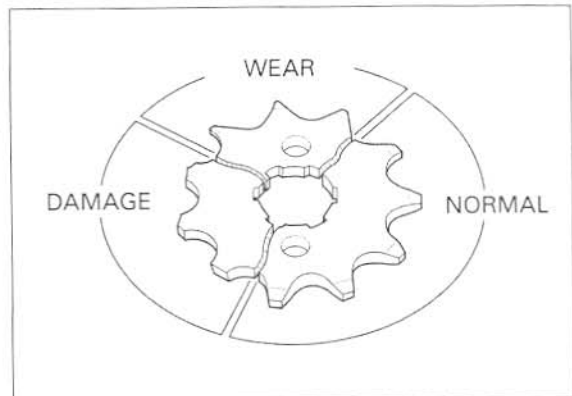

Check the attaching bolts and nuts on the drive and driven sprockets. If any are loose, torque them.

TORQUE:

Drive sprocket special bolt: 54 N·m (5.5 kg·m, 40 lbf·ft)
Final driven sprocket nut: 64 N·m (6.5 kgf·m, 47 lbf·ft)

