


REAR FENDER/MUD GUARD

REMOVAL/INSTALLATION

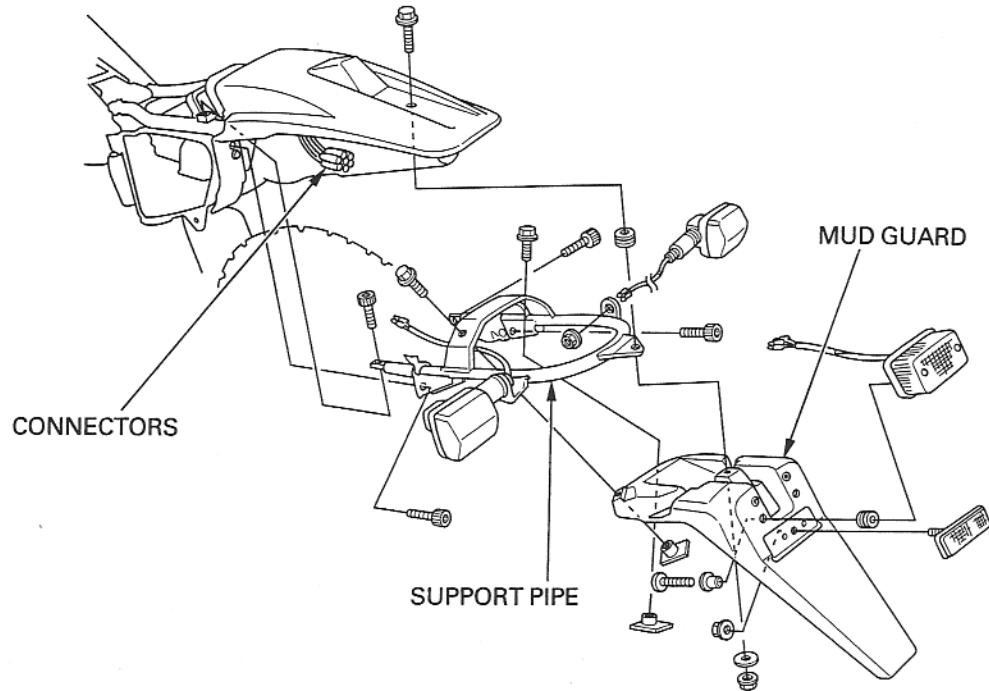

Remove the seat and side covers (page 2-2).
Disconnect the turn signal light and tail/brake light connectors.

Remove the bolts and sub-frame support pipe with the mud guard.
Remove the bolts/collars and mud guard from the support pipe.

Remove the bolt and rear brake reservoir from the bracket.
Remove the bolts and rear fender.

Installation is in the reverse order of removal.

