


CLIP

Removal:

1. Press down on the center pin to release the lock.
2. Pull out the clip B from the hole.

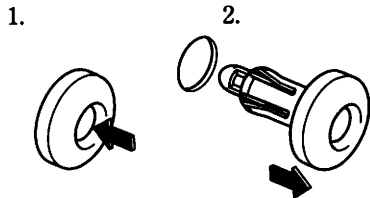

Installation:

1. Push the bottom of the pin.
2. Insert the clip B into the hole.
3. Lightly press down on the center pin to lock the clip B.

