

Tyres

Always check air pressure when your tyres are "cold." If you check air pressure when your tyres are "warm" — even if your ATV has only been ridden for a few miles — the readings will be higher. If you let air out of warm tyres to match the recommended cold tyre pressures, the tyres will be underinflated. Be sure to check tyre pressure at the riding site, since changes in altitude can affect air pressure.


The recommended "cold" tyre pressures are:

		FRONT	REAR
NO CARGO	RECOMMENDED PRESSURE	30 kPa (0.30 kgf/cm ² , 4.4 psi)	25 kPa (0.25 kgf/cm ² , 3.6 psi)
	MAXIMUM PRESSURE	34 kPa (0.34 kgf/cm ² , 5.0 psi)	28 kPa (0.28 kgf/cm ² , 4.0 psi)
	MINIMUM PRESSURE	26 kPa (0.26 kgf/cm ² , 3.8 psi)	22 kPa (0.22 kgf/cm ² , 3.2 psi)
WITH CARGO	RECOMMENDED PRESSURE	30 kPa (0.30 kgf/cm ² , 4.4 psi)	25 kPa (0.25 kgf/cm ² , 3.6 psi)

Tyres

Also, if you hit a pothole or other hard object while riding, stop as soon as you safely can and carefully inspect the tyres for damage.

Tread Wear

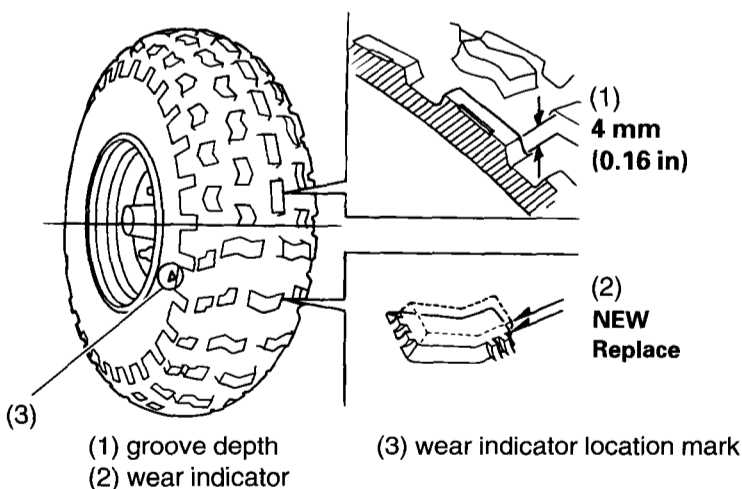

To check the condition of a tyre tread, measure the groove depth (1) in the centre of the tyre, or check the wear indicator (2). For best performance, you should replace a tyre before the tread depth at the centre reaches the following limits:

front	4 mm (0.16 in)
rear	4 mm (0.16 in)